

Stufa a pellet dal design contemporaneo,  
per la produzione di acqua da riscaldamento  
con sistema di ventilazione regolabile.  
Predisposizione kit per acqua calda sanitaria.

Pellet stove with a contemporary design,  
for the production of water by heating  
with adjustable ventilation system.  
Preparation kit for domestic hot water.

- Monoblocco in acciaio
- Maniglia in acciaio verniciato
- Deflettore d'aria
- Cassetto cenere estraibile
- Centralina di programmazione
- Pulizia ciclica del braciere
- Braciere in acciaio
- Rivestimento in acciaio verniciato
- Piano superiore in acciaio verniciato
- Scarico fumi di serie
- Telecomando
- Acqua calda sanitaria (optional)

- Monobloc stainless steel
- Painted steel handle
- Air deflector
- Removable ash drawer
- Control programming
- Cleaning cyclic brazier
- Stainless brazier
- Coating painted steel
- Top in painted steel
- Exhaust fumes series
- Remote control
- Hot water (optional)



Cod. ST03-W (white)



Cod. ST03-B (black)





Cod. ST03-I (ivory)




Cod. ST03-R (red)




Cod. ST03-CK (wengé)

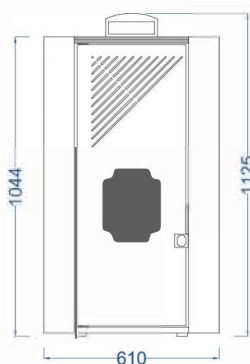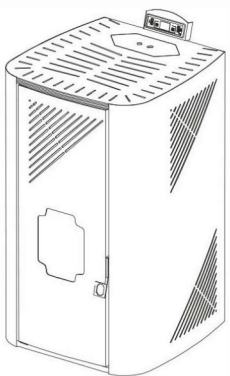


Fronte / Front



Alto / Top

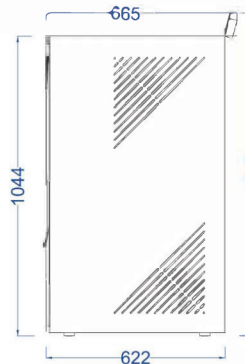

Lato destro / DX side

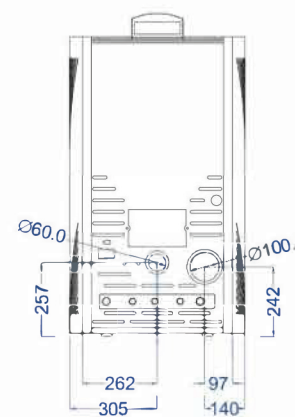

Retro / Back side

Dimensioni (cm) / Dimensions (cm)

61,0 L x 62,2 P x 104,4 H ▪ con porta display 61,0 L x 66,5 P x 112,5 H

Peso netto (Kg) / Net weight (Kg)

196

Volume riscaldabile (m<sup>3</sup>) / Room heating capacity (m<sup>3</sup>)

460

Metri quadri riscaldabili (m<sup>2</sup>) / Room heating capacity (m<sup>2</sup>)

170

Potenza termica del focolare (kW) / Firebox heat output

18,4

Potenza termica nominale / Nominal heat output (kW min-max)

5,2 - 15,9

Rendimento termico / Thermal efficiency (%)

87

Consumo nominale / Nominal consumption (Kg min-max)

1,24 - 3,81

Capienza serbatoio / Hopper capacity (litri - Kg circa)

55 litri ▪ 35 Kg